

Figure 1

2/9

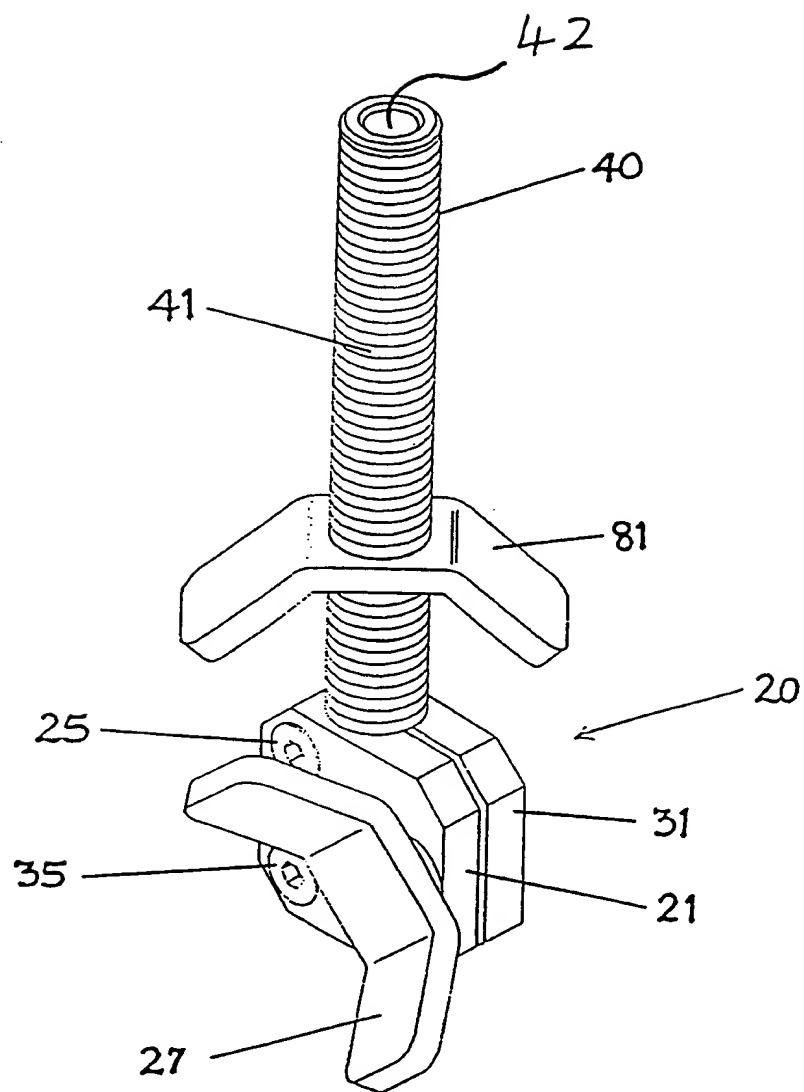


Figure 2

09890771-030502

3/9

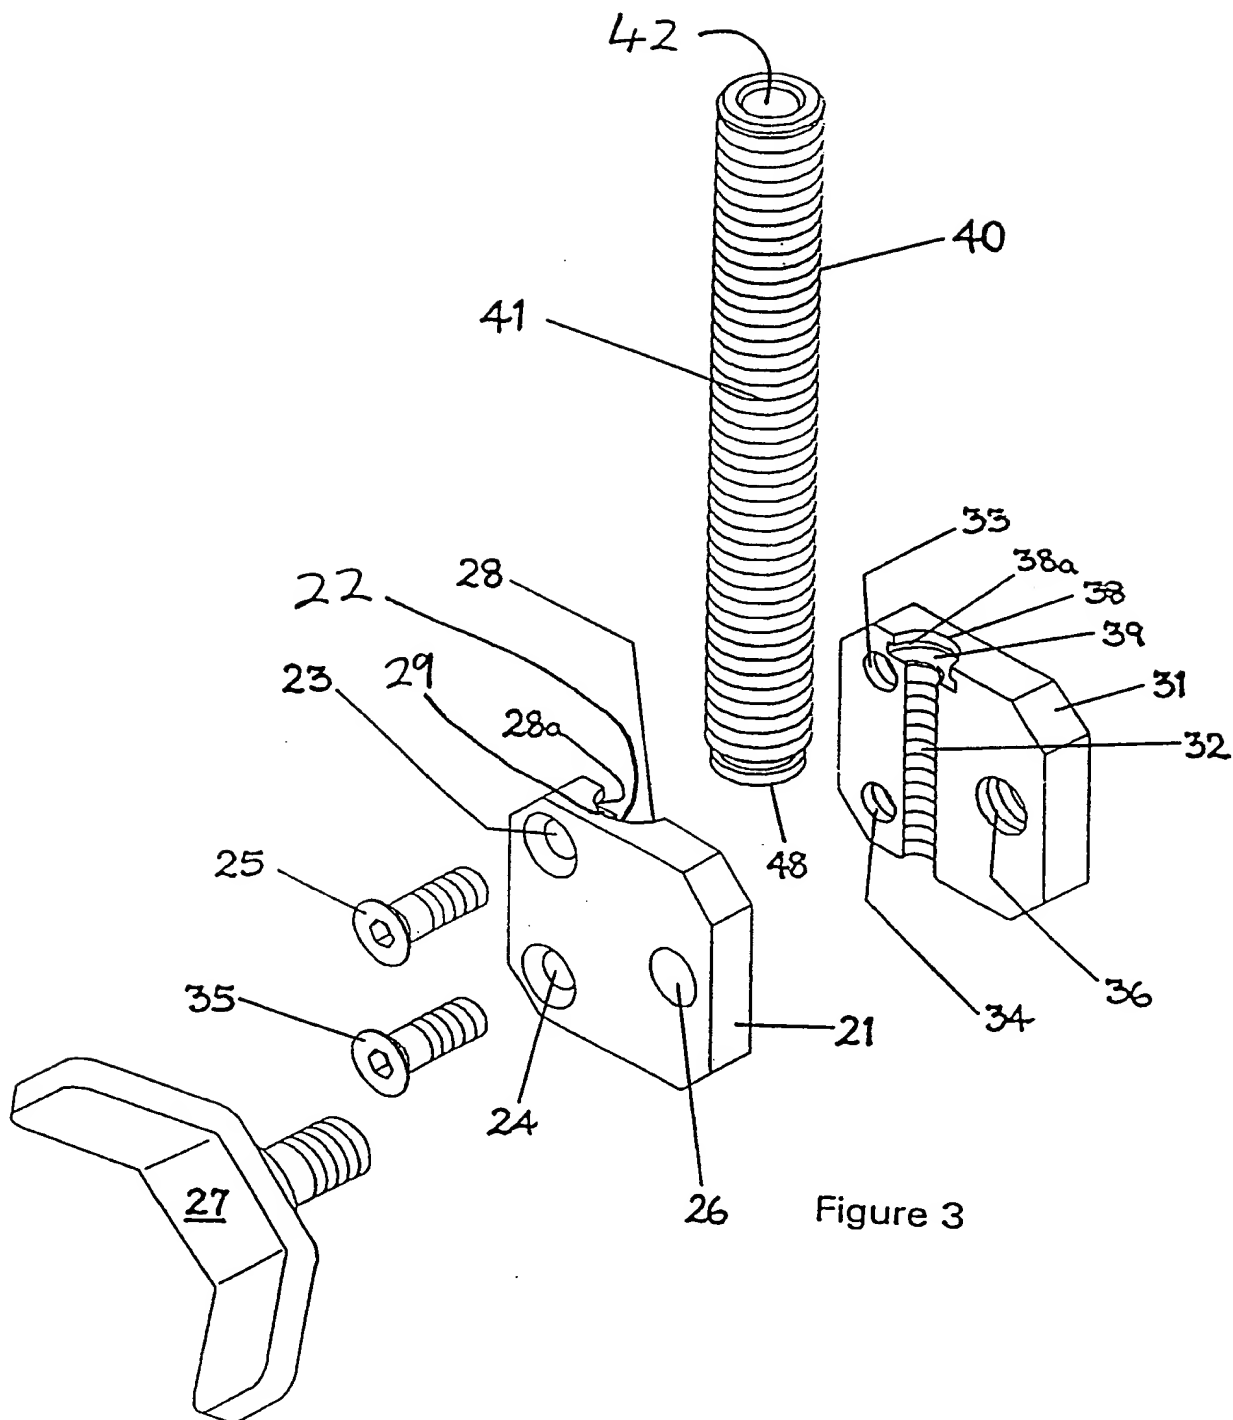


Figure 3

4/9

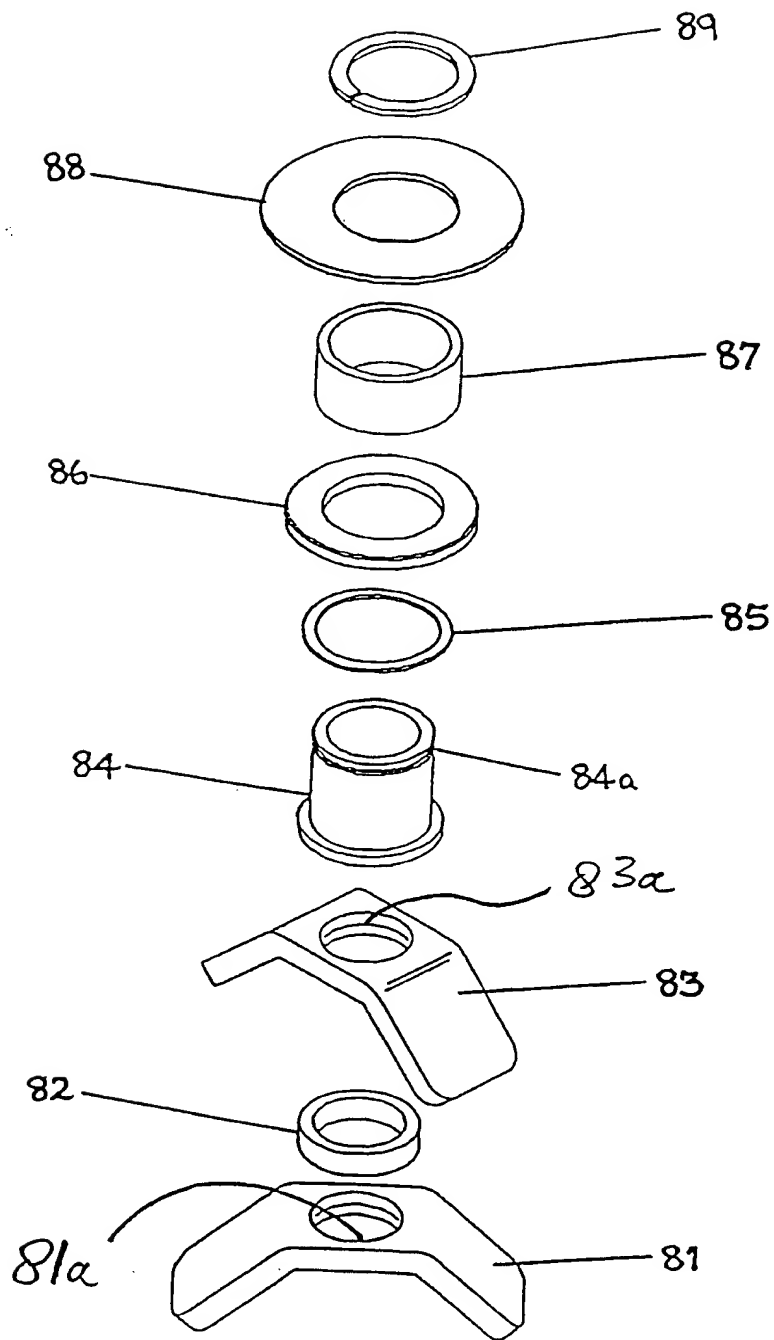


Figure 4

09890771.030502

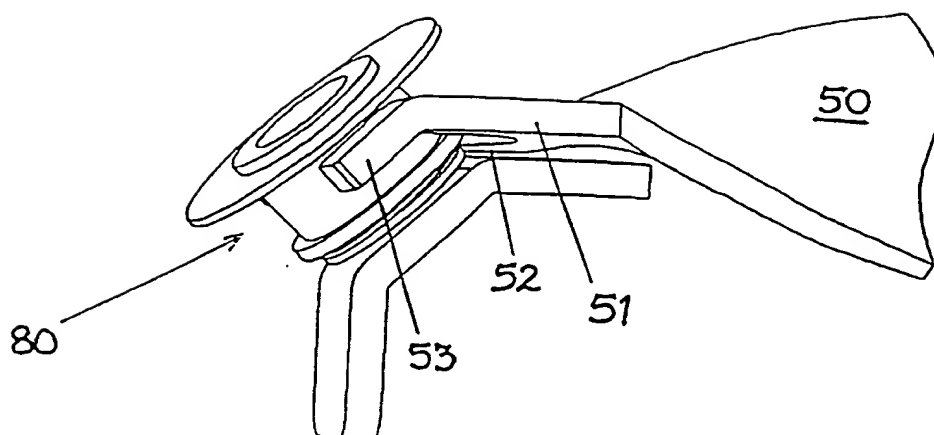


Figure 5

6/9

Figure 7


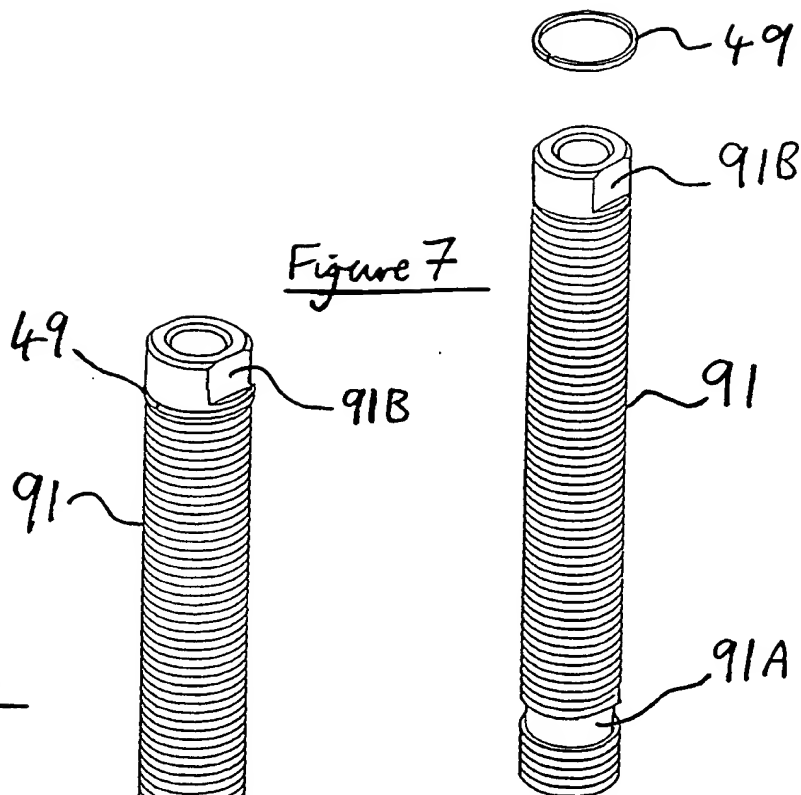


Figure 6

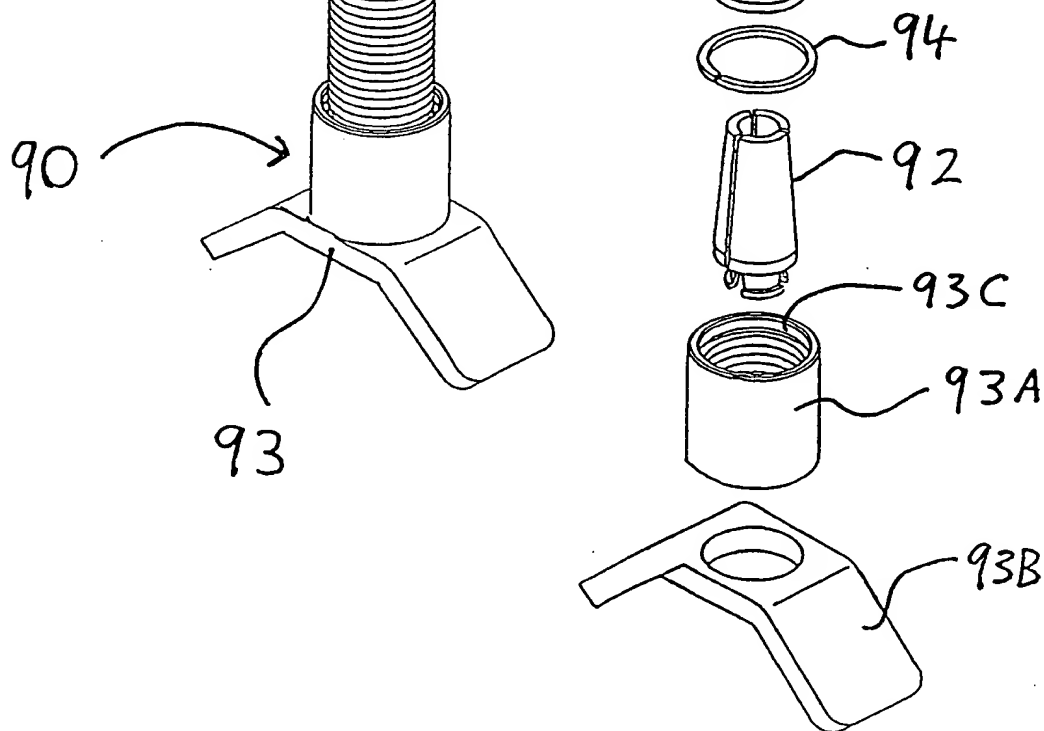

7/9

Figure 8

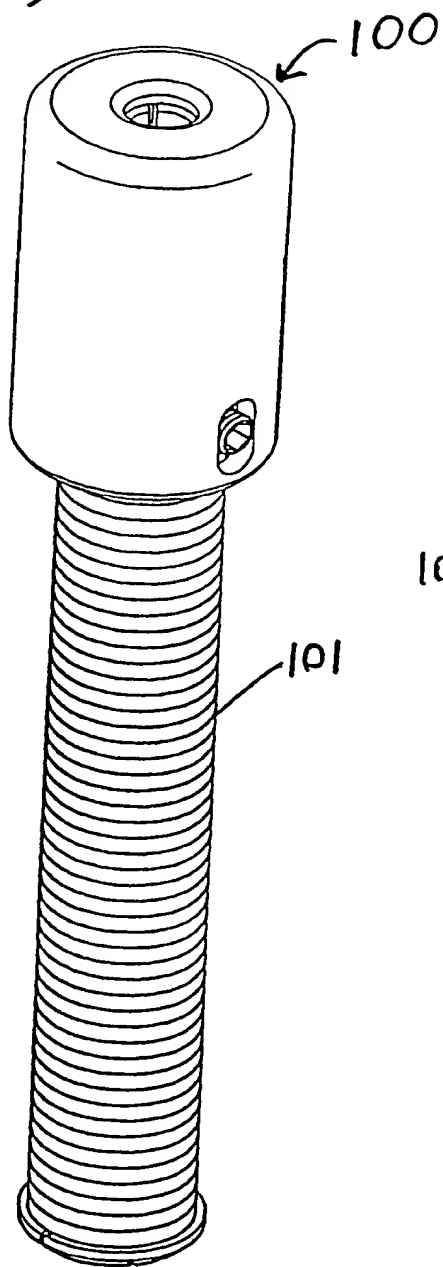


Figure 9

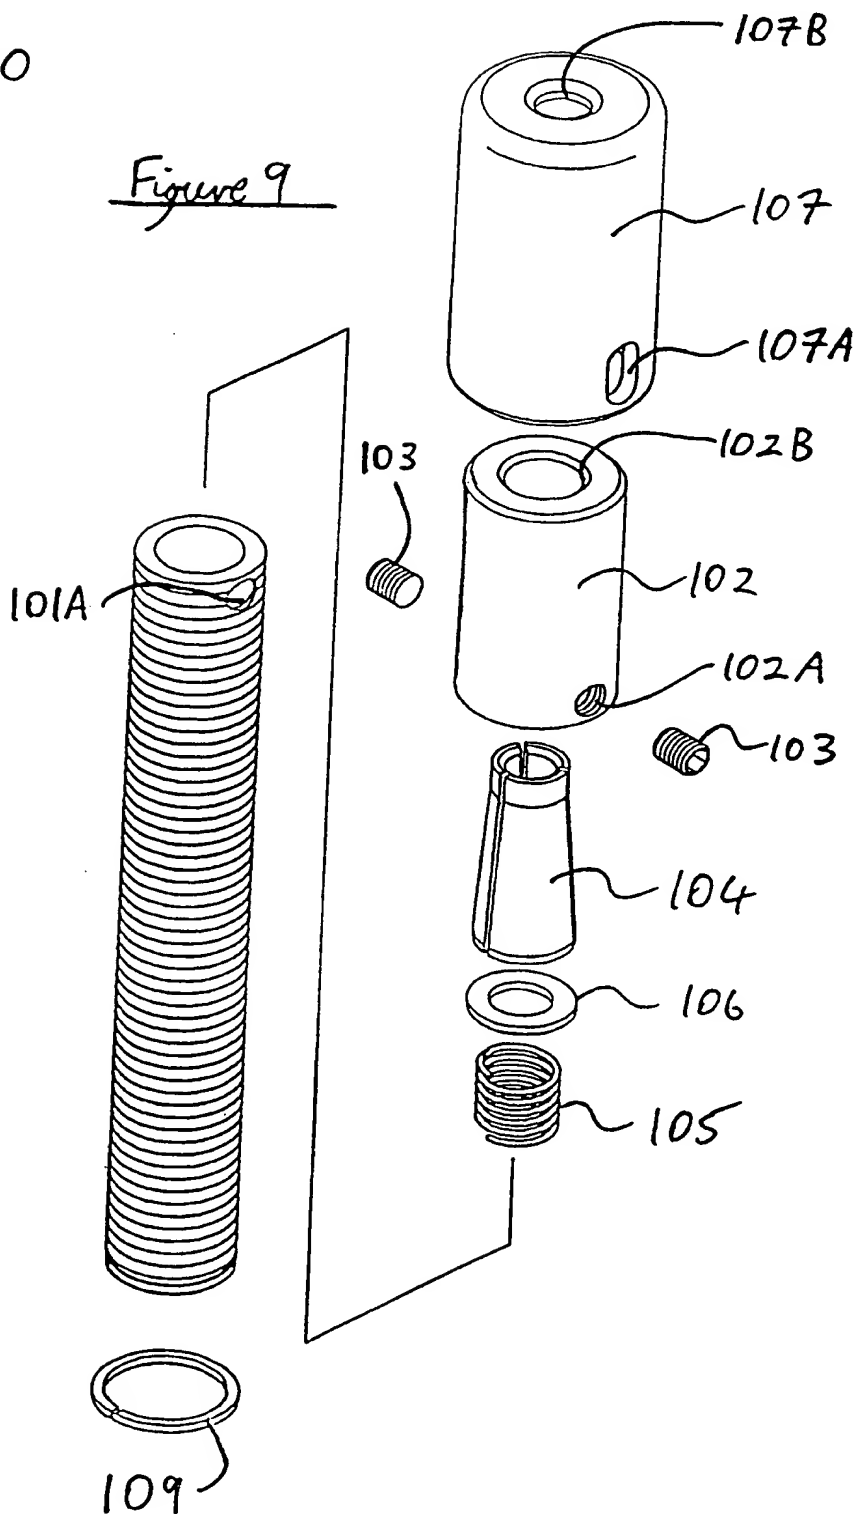


Figure 10

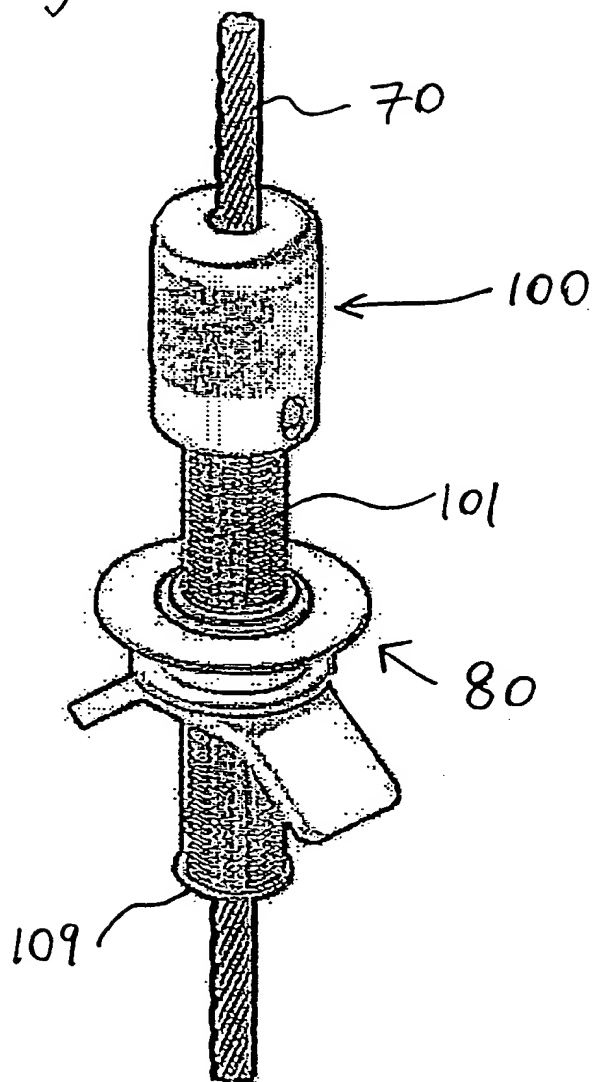


Figure 11

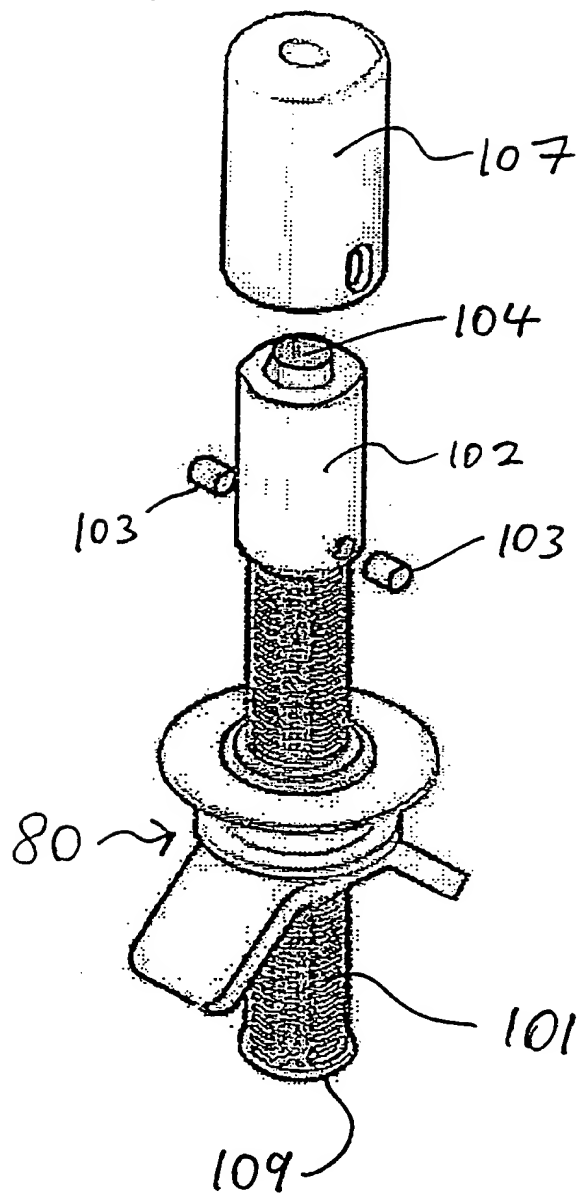




Figure 12

70

49

80

114A

114

114A

110

112

112

This diagram shows an exploded perspective view of a fastener assembly. At the top is a bolt 111 with a hexagonal head 114 and a threaded shank 111A. A washer 114A is positioned between the head 114 and the shank 111A. Below the bolt is a pin 112, which is a long, cylindrical component with a textured surface. At the bottom is a nut 113, which is a cylindrical component with a threaded interior and a flange base.